

## OPERATION

### Last Number Redial

This function can be used conveniently when the line is busy or to place a call to the number last dialed (up to 31 digits).

- The last dialed number will be stored in the redial memory.
- The stored number will be retained in memory until a new phone number is dialed.
- Confirm dial tone after lifting handset or pressing hook switch once if you were busy on a call or the line was busy and there was no dial tone present.
- Press the Redial button, then your telephone dials automatically the number last called.
- Converse when the called party answers.

### Handset Volume Control

LKA 200 provides a volume button that can be pressed to increase or decrease the handset volume while on an active call.

### One - Touch Memory

There are 3 addresses for One-touch memory to make speed dial.

- Press "P/M" button when off hook state.
- Select "M1, M2 or M3" to store the number into memory.
- Dial the desired number.
- For next dial, just go off hook and press M1, M2 or M3 to dial.

### Message Waiting Indicator

When used behind a communication system that provides message waiting, the lamp will light to indicate an incoming message has been received on line.

[5]

## OPERATION

### Ring Volume & Tone Control

LKA 200 provides 3 ring tones, each with 3 levels of ring sound volume. These ring settings can be programmed according to the procedure below:

- Lift up handset.
- Press P/M you will hear a beep sound in the handset.
- Then press the '#' button followed by the number corresponding to the ring tone and sound level that you require:

- '1' Tone 1, Volume Low
- '2' Tone 1, Volume Middle
- '3' Tone 1, Volume High
- '4' Tone 2, Volume Low
- '5' Tone 2, Volume Middle
- '6' Tone 2, Volume High (default)
- '7' Tone 3, Volume Low
- '8' Tone 3, Volume Middle
- '9' Tone 3, Volume High
- '0' Temporary ring sound off

Note: If digit '0' is programmed, the tone ringer will be turned off until next off-hook, where it will automatically return last programmed setting.

[6]

## MEMO

P/NO : MMBB9194502 , Issue 1

May 11, 2006



## Telephone System

### SLT User Guide

MODEL: LKA 200



## SINGLE LINE TELEPHONE

### Features

- LKA 200 is an electronic telephone used at home/office.
- It offers high quality, various useful functions with graceful design.
- The features are as follows:
  - Mute
  - Recall
  - Pause
  - Redial
  - Handset volume control
  - One-touch memory (3 addresses)
  - Message waiting indicator
  - Programmable ring volume & tone control (10 presets)

### Information

- Avoid high temperature places or direct heat.
- Use a dry cloth to clean exterior of the phone. (Do not use solvents such as benzene or thinner.)


### Accessories

At first, check to make sure that you have all the parts as shown,

- Base set
- Handset
- Tel. Line Cord
- User Manual


## NAME OF PARTS

### Front of the Phone

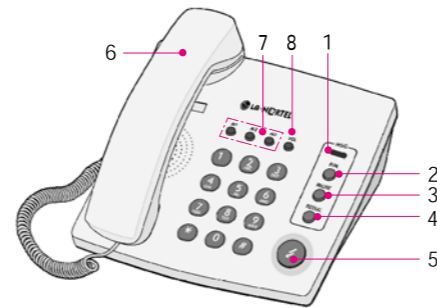

- |                              |                                  |
|------------------------------|----------------------------------|
| 1 Message waiting indication | 6 Handset                        |
| 2 Prog/Mute                  | 7 One-touch memory (3 addresses) |
| 3 Pause                      | 8 Handset volume control         |
| 4 Redial                     |                                  |
| 5 Recall                     |                                  |


### Bottom of the Phone

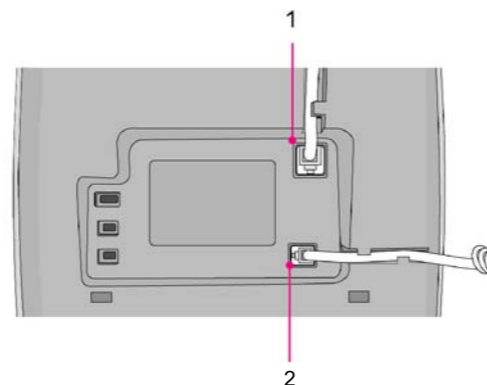

- |                           |
|---------------------------|
| 1 Connector for Line cord |
| 2 Connector for Handset   |

## INSTALLATION

### Installation

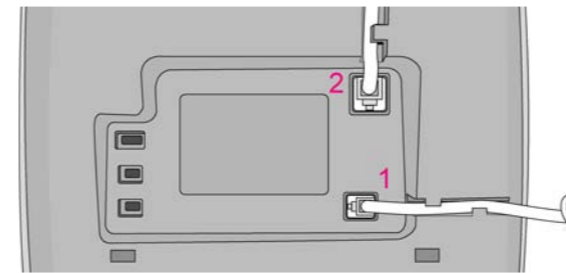

- 1 Insert the handset cord into the socket identified with a handset symbol on the base and press it into the groove.
- 2 Connect the line cord to the base by inserting it in the socket on the base identified with a telephone symbol.
- 3 Insert the line cord in the groove. Then connect the other end of line cord to the telephone wall socket.
- 4 Lift the handset and listen for dial tone to ensure that the telephone is ready to be used. If there is no dial tone, depress and release the cradle switch a few times.

## OPERATION

### Place a call

- Confirm Dial tone after lifting handset.
- Dial the desired telephone number.
- Converse when called party answers.
- Hang up the handset to terminate the phone call.

### Receiving a Call

- When you hear a ringing tone.
- Lift handset from cradle and converse.

### MUTE Function

Pressing the P/M key during a call will disable the microphone, allowing you to have a private conversation without the other call party hearing you.

When the MUTE function is activated, you will hear a beep sound in the handset receiver.

### RECALL

This function can be used conveniently when you want to transfer the current call to another extension number.

- While the call is connected, press the Recall button.
  - Your Present call will be placed on hold.
  - You will hear a dial tone.
- Dial a desired extension telephone number.
- If the extension telephone number is busy, you can reconnect to the original calling party by pressing the Recall button again.
- If the extension telephone number answers or when you hear a ringback tone forwarding to the extension telephone number, hang up to complete the call transfer.

### PAUSE

This function can be used when your telephone is connected to PABX. It is particularly important exchange from PABX to CO line.

- After dialing a PABX code to seize CO line, press Pause button.
- Dial a desired external party.